


PCB Piezotronics Inc. claims proprietary rights in the information disclosed hereon. Neither it nor any reproduction thereof will be disclosed to others without written consent of PCB Piezotronics Inc.

19514

APPLICATION		
NEXT ASS'Y	USED ON	VAR

REVISIONS				
REV	DESCRIPTION	ECN	DATE	APP'D

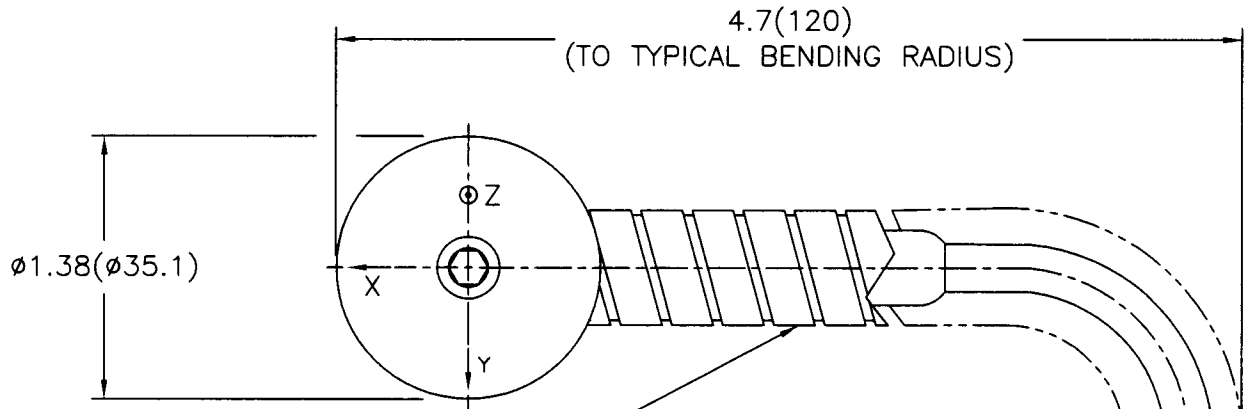


INTEGRAL ARMOR CABLE
(MOLDED 4 CONDUCTOR
SHIELDED CABLE)
TERMINATING IN BLUNT CUT,
10 FEET (3 METERS)
FROM APPLICATION.

SEE WIRE COLOR
REFERENCE BELOW

WIRE COLOR REFERENCE

RED: "X" AXIS
WHITE: "Z" AXIS
BLACK: GND
GREEN: "Y" AXIS

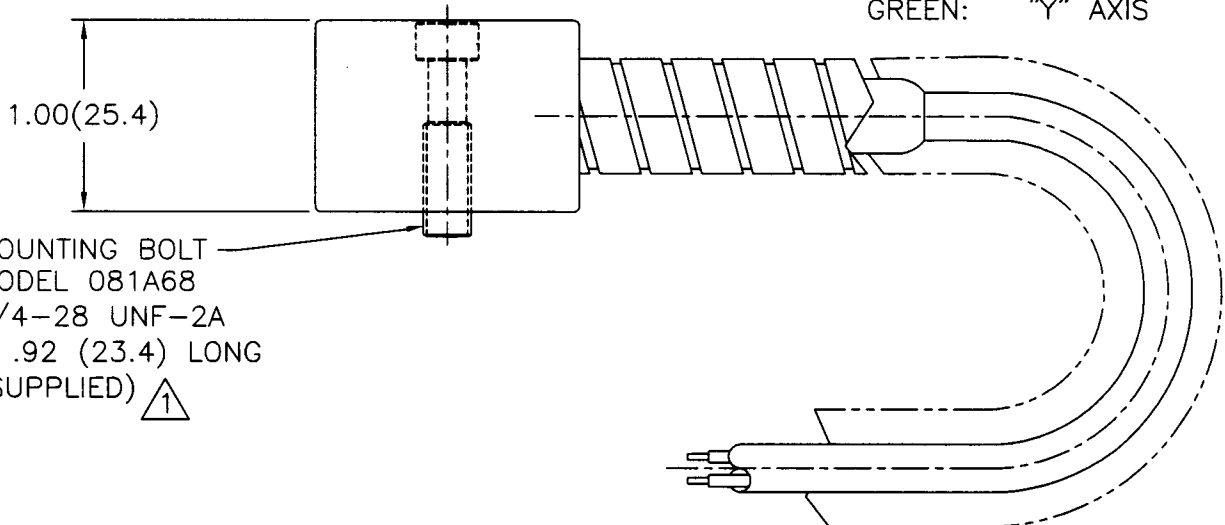

MOUNTING BOLT
MODEL 081A68
1/4-28 UNF-2A
X .92 (23.4) LONG
(SUPPLIED) $\triangle$

$\triangle$ FOR METRIC RING TRIAXIAL ACCELEROMETER (MODEL M604B61) USE MOUNTING BOLT
MODEL M081A68, M6 X 1.00-6g X .92(23) LONG.

UNLESS SPECIFIED TOLERANCES		DRAWN		MFG		PCB PIEZOTRONICS™	
DIMENSIONS IN INCHES	DIMENSIONS IN MILLIMETERS (IN PARENTHESIS)	CHK'D	ENG'D	APP'D	SALES	3425 WALDEN AVE. DEPEW, NY 14043 (716) 684-0001 EMAIL: SALES@PCB.COM	CODE IDENT. NO. 52681
DECIMALS XX ±.01 XXX ±.005 ANGLES ±2 DEGREES	DECIMALS XX ±0.3 XXX ±0.13 ANGLES ±2 DEGREES	1/13	5/24/02	6/3/02	6/6/02		
FILLET AND RADII .003 - .005	FILLET AND RADII (0.07 - 0.13)	TITLE OUTLINE DRAWING MODEL 604B61, M RING TRIAXIAL ACCELEROMETER					DWG. NO. 19514
DD011 REV. B 03/13/98		SCALE: FULL					SHEET 1 OF 1