Model Number 356A13	TRIAXIAL ICP® ACCELEROMETER	Revision D ECN #: 35759

Performance	ENGLISH	SI	
Sensitivity (±20 %)	5 mV/g	0.51 mV/(m/s²)	
Measurement Range	±1000 g pk	±9810 m/s² pk	
Frequency Range (±5 %) (y or z axis)	2 to 8000 Hz	2 to 8000 Hz	
Frequency Range (±5 %) (x axis)	2 to 5000 Hz	2 to 5000 Hz	
Frequency Range (+1 dB) (x axis)	≥8 kHz	≥8 kHz	
Resonant Frequency	≥50 kHz	≥50 kHz	
Broadband Resolution (1 to 10000 Hz)	0.003 g rms	0.03 m/s² rms	[1]
Non-Linearity	≤1 %	≤1 %	[3]
Transverse Sensitivity	≤5 %	≤5 %	
Environmental			
Overload Limit (Shock)	±10000 g pk	±98100 m/s² pk	
Temperature Range (Operating)	-65 to +250 °F	-54 to +121 °C	[2]
Temperature Response	See Graph	See Graph	
Electrical			
Excitation Voltage	18 to 30 VDC	18 to 30 VDC	
Constant Current Excitation	2 to 20 mA	2 to 20 mA	
Output Impedance	≤200 ohm	≤200 ohm	
Output Bias Voltage	7 to 11 VDC	7 to 11 VDC	
Discharge Time Constant	0.24 to 1.0 sec	0.24 to 1.0 sec	
Settling Time (within 10% of bias)	<3 sec	<3 sec	
Spectral Noise (1 Hz)	1200 µg/√Hz	11772 (µm/sec^2/√Hz	[1]
Spectral Noise (10 Hz)	300 µg/√Hz	2943 (µm/sec^2/√Hz	[1]
Spectral Noise (100 Hz)	100 µg/√Hz	981 (µm/sec^2/√Hz	[1]
Spectral Noise (1 kHz)	30 µg/√Hz	294 (µm/sec^2/√Hz	[1]
Physical			
Sensing Element	Ceramic	Ceramic	
Sensing Geometry	Shear	Shear	
Housing Material	Titanium	Titanium	
Sealing	Hermetic	Hermetic	
Size (Height x Length x Width)	0.25 in x 0.375 in x 0.25 in	6.35 mm x 9.53 mm x 6.35 mm	
Weight (without cable)	0.04 oz	1.0 gm	[1]
Electrical Connector	Integral Cable	Integral Cable	
Electrical Connection Position	Side	Side	
Cable Termination	1/4-28 4-Pin Jack	1/4-28 4-Pin Jack	
Cable Length	5 ft	1.5 m	[4]
Cable Type	099 Twisted 4-cond	099 Twisted 4-cond	
Mounting	Adhesive	Adhesive	

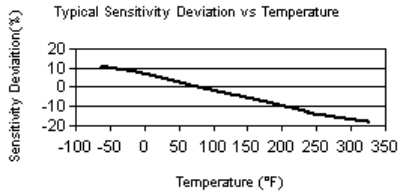

Optional Versions (Optional versions have identical specifications and accessories as listed for standard model except where noted below. More than one option maybe used.)

HT - High temperature, extends normal operation temperatures

Temperature Range (Operating)	-65 to +325 °F	-54 to +163 °C

Notes

[1] Typical.
[2] 250° F to 325° F data valid with HT option only.
[3] Zero-based, least-squares, straight line method.
[4] To ensure EMI and cross talk does not affect the noise specification, the integral cable is limited to 5 feet.
[5] See PCB Declaration of Conformance PS023 for details.

Supplied Accessories

034G05 4-cond. shielded cable, 5 ft (1.5M), 4-pin plug to (3) BNC plugs (1)
080A109 Petro Wax (1)
080A90 Quick Bonding Gel (1)
ACS-1T NIST traceable triaxial amplitude response, 10 Hz to upper 5% frequency. (1)

Entered: LLH	Engineer: SDS	Sales: WDC	Approved: JJB	Spec Number:
Date: 05/13/2011	Date: 05/10/2011	Date: 05/12/2011	Date: 05/12/2011	**27705**

PCB PIEZOTRONICS VIBRATION DIVISION
3425 Walden Avenue
Depew, NY 14043
UNITED STATES
Phone: 888-684-0013
Fax: 716-685-3886
E-mail: vibration@pcb.com
Web site: www.pcb.com

All specifications are at room temperature unless otherwise specified. In the interest of constant product improvement, we reserve the right to change specifications without notice. ICP® is a registered trademark of PCB group, Inc.	