


1329

APPLICATION		
NEXT ASS'Y	USED ON	VAR

REVISIONS				
REV	DESCRIPTION	ECN	DATE	APP'D

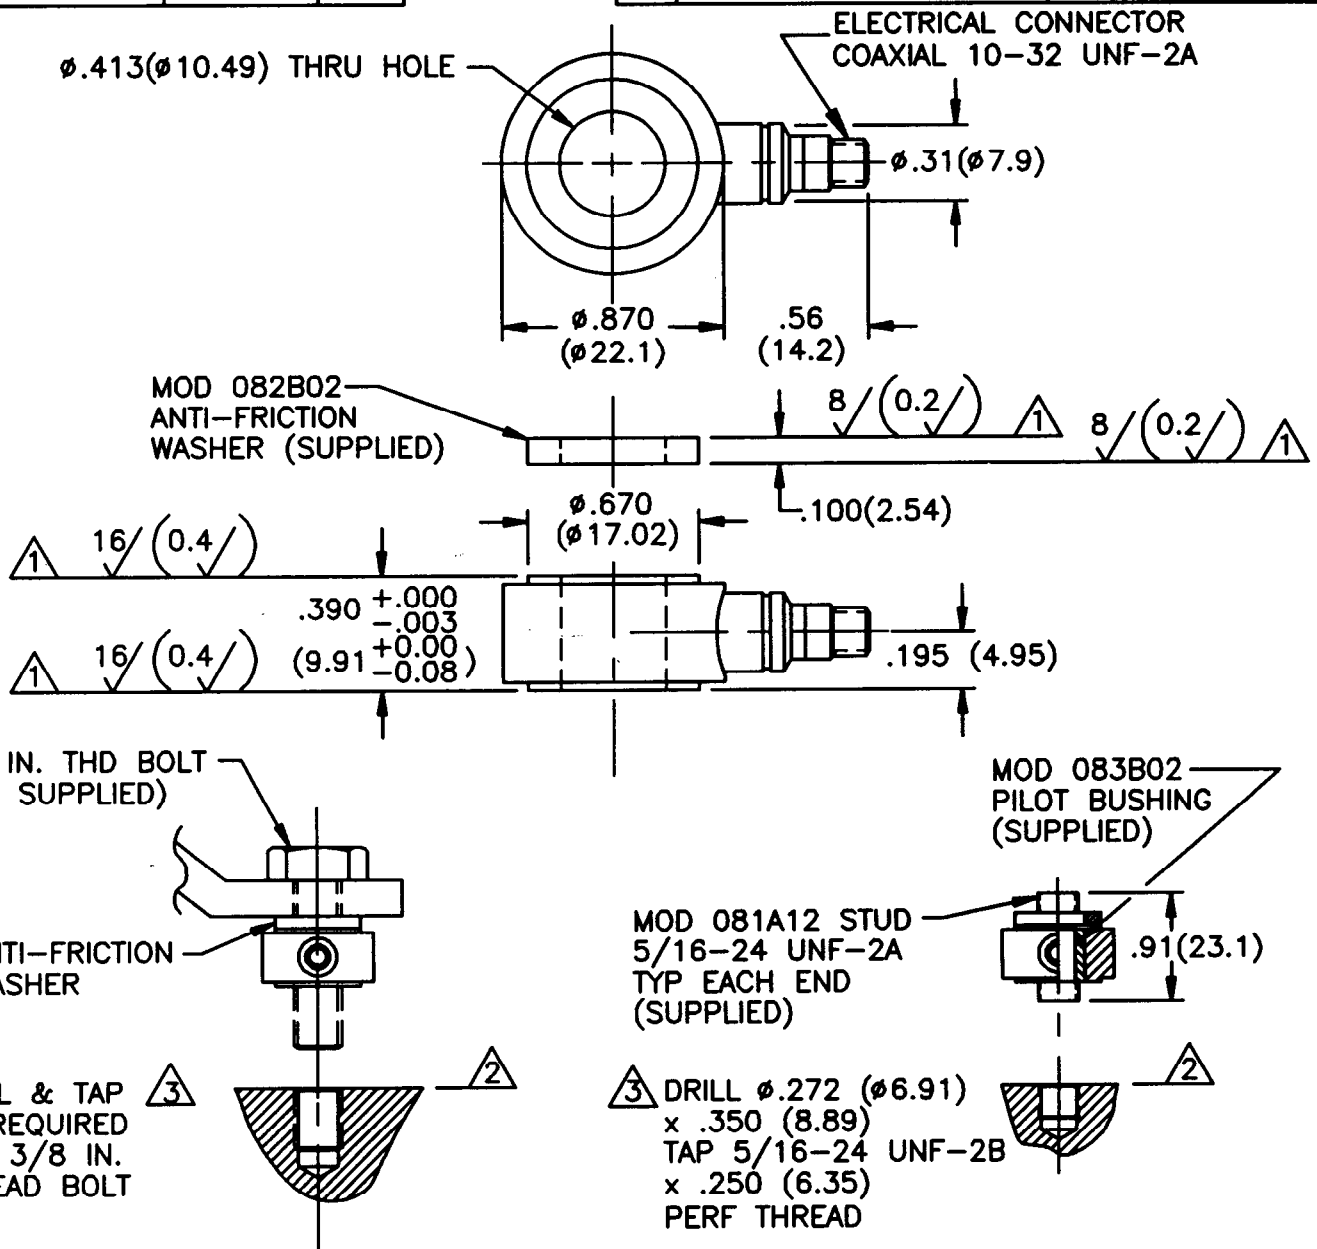

4.) SEE MANUAL FOR PRELOAD INSTRUCTIONS.

③ DRILL PERPENDICULAR TO MOUNTING SURFACE WITHIN $\pm 1^\circ$.

② MOUNTING SURFACE UNDER FORCE RING MUST BE FLAT WITHIN .001 (0.03) WITH AT LEAST 125/(3.2) FINISH.

① THESE SURFACES FLAT AND PARALLEL TO WITHIN .001 (0.03) TIR.

UNLESS SPECIFIED TOLERANCES		DRAWN				MFG	
DIMENSIONS IN INCHES	DIMENSIONS IN MILLIMETERS (IN PARENTHESIS)	CHK'D	6/10/94	ENGR	6/10/94	DATE	6/10/94
DECIMALS XX $\pm .01$	DECIMALS X ± 0.3	APP'D	6/10/94	DATE	6/10/94	CODE	52681
XXX $\pm .005$	XX ± 0.13	TITLE				DWG. NO.	1329
ANGLES ± 2 DEGREES	ANGLES ± 2 DEGREES	INSTALLATION DRAWING				SCALE:	1.33=1
FILLETS AND RADII .003 - .005 (0.07 - 0.13)		MODEL 212B				SHEET 1 OF 1	
		FORCE RING					

PCB PIEZOTRONICS, INC.
3425 WALDEN AVE. DEPEN, NEW YORK 14043
PHONE: (716) 684-0001